

Heat pump , (0K3)
from October 2016**Audi**


Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.



Thermal management control module


- J533 Data bus on board diagnostic interface
- J1024 Thermal management control module
- SF Fuse panel F
- SF2 Fuse 2 (on fuse panel F)
- ST3 Fuse panel 3
- ST4 Fuse panel 4
- SF6 Fuse 6 (on fuse panel F)
- SF11 Fuse 11 (on fuse panel F)
- T32b 32-pin connector, black
- T40a 40-pin connector, black

- 51 Ground connection in luggage compartment, right
- B776 Hybrid CAN bus high connection 1 (in main wiring harness)
- B777 Hybrid CAN bus low connection 1 (in main wiring harness)
- * Refer to applicable wiring diagram for fuse positions

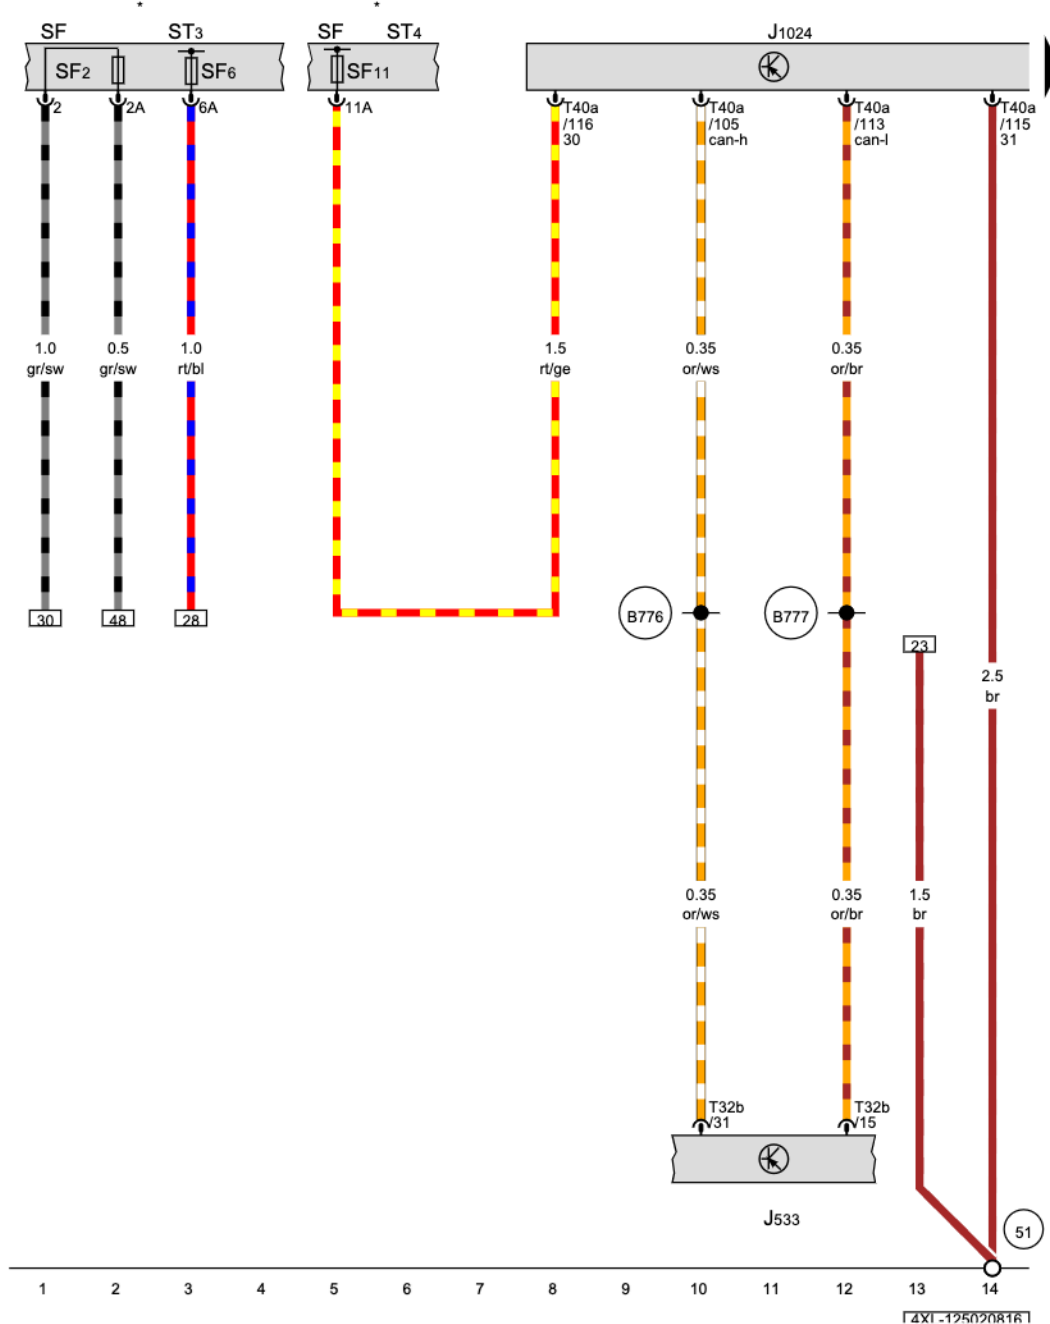

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted unless authorised by AUDI AG. AUDI AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

- ws = white
- sw = black
- ro = red
- rt = red
- br = brown
- gn = green
- bl = blue
- gr = grey
- li = lilac
- vi = lilac
- ge = yellow
- or = orange
- rs = pink

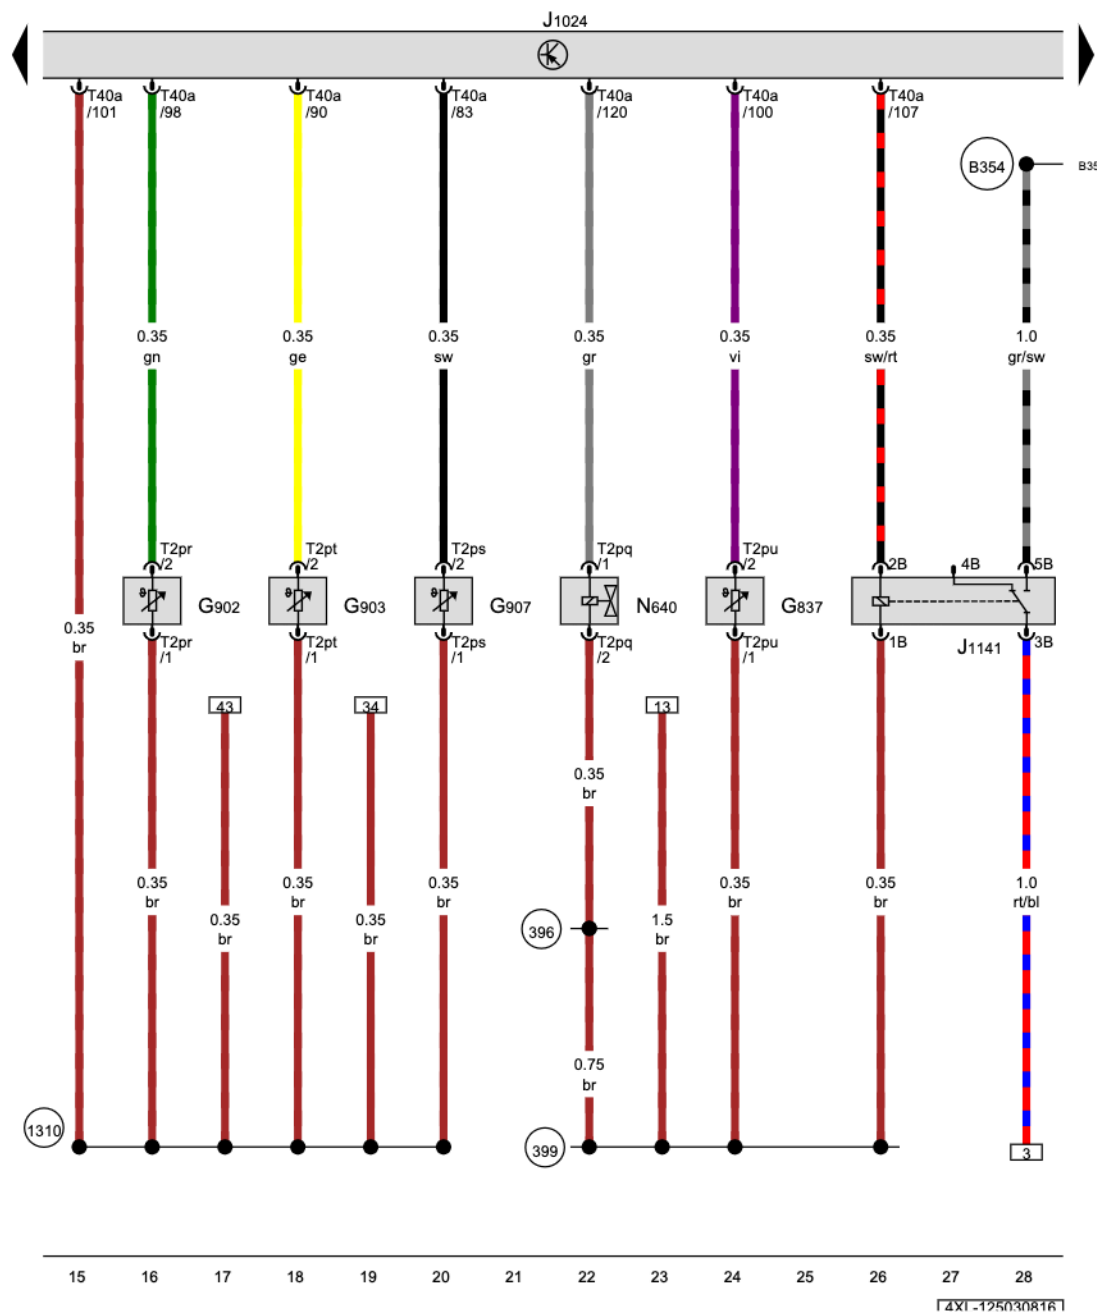

Engine coolant level sensor 2, Thermal management coolant temperature sensor 1, Thermal management coolant temperature sensor 2, Thermal management coolant temperature sensor 6, Thermal management control module, Thermal management coolant pump relay, Refrigerant shut-off valve 2

- G837 Engine coolant level sensor 2
- G902 Thermal management coolant temperature sensor 1
- G903 Thermal management coolant temperature sensor 2
- G907 Thermal management coolant temperature sensor 6
- J1024 Thermal management control module
- J1141 Thermal management coolant pump relay
- N640 Refrigerant shut-off valve 2
- T2pq 2-pin connector, black
- T2pr 2-pin connector, black
- T2ps 2-pin connector, black
- T2pt 2-pin connector, black
- T2pu 2-pin connector, black
- T40a 40-pin connector, black

396 Ground connection 31 (in main wiring harness)


399 Ground connection 34 (in main wiring harness)

1310 Ground connection 36 (in main wiring harness)

B354 Positive connection 5 (87a) (in main wiring harness)

ws = white
sw = black
ro = red

rt = red
br = brown
gn = green
bl = blue
gr = grey
li = lilac
vi = lilac
ge = yellow
or = orange
rs = pink

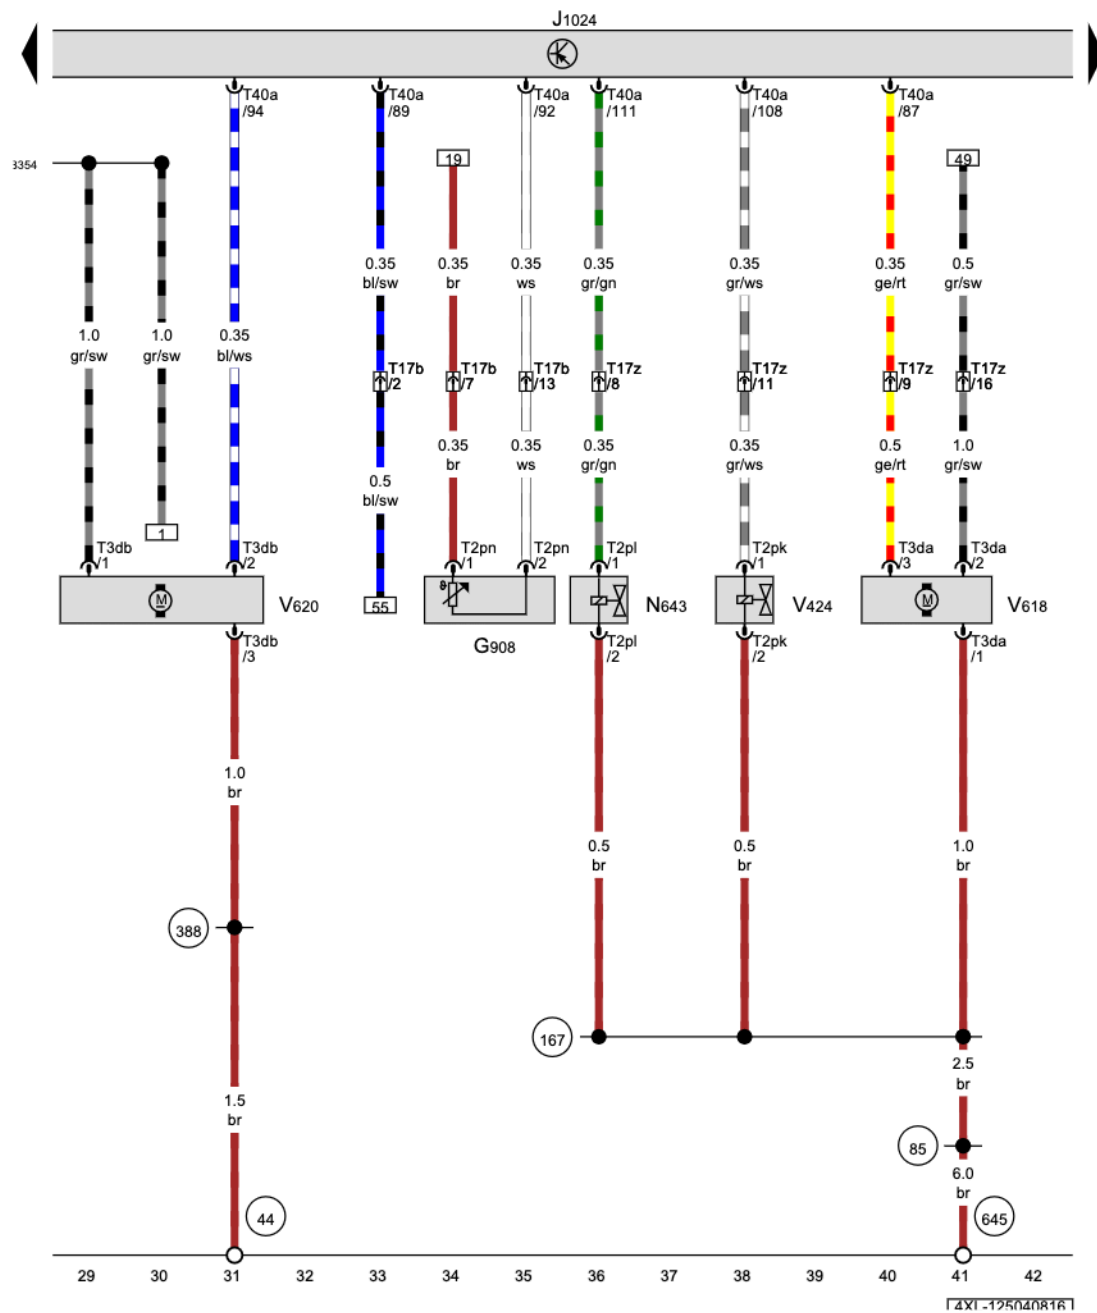


Thermal management coolant temperature sensor 7,
Thermal management control module, Refrigerant shut-off
valve 5, Refrigerant shut-off valve, Thermal management
coolant pump 2, Thermal management coolant pump 4

- | | |
|-------|--|
| G908 | Thermal management coolant temperature sensor 7 |
| J1024 | Thermal management control module |
| N643 | Refrigerant shut-off valve 5 |
| T2pk | 2-pin connector, black |
| T2pl | 2-pin connector, black |
| T2pn | 2-pin connector, black |
| T3da | 3-pin connector, black |
| T3db | 3-pin connector, black |
| T17b | 17-pin connector, Left plenum chamber E-box connector station, red |
| T17z | 17-pin connector, Left plenum chamber E-box connector station, brown |
| T40a | 40-pin connector, black |
| V424 | Refrigerant shut-off valve |
| V618 | Thermal management coolant pump 2 |
| V620 | Thermal management coolant pump 4 |
| 44 | Ground connection on A-pillar, lower left |
| 85 | Ground connection 1 (in engine compartment wiring harness) |
| 167 | Ground connection 4 (in engine compartment wiring harness) |
| 388 | Ground connection 23 (in main wiring harness) |
| 645 | Ground connection 1 on bulkhead |
| B354 | Positive connection 5 (87a) (in main wiring harness) |

Protected by copyright. Copying for private or commercial purposes, in part or in whole, is not permitted without express authorisation by Audi AG. Audi AG does not guarantee or accept any liability with respect to the correctness of information in this document. Copyright by AUDI AG.

ws = white
sw = black
ro = red
rt = red
br = brown
gn = green
bl = blue
gr = grey
li = lilac
vi = lilac
ge = yellow
or = orange
rs = pink

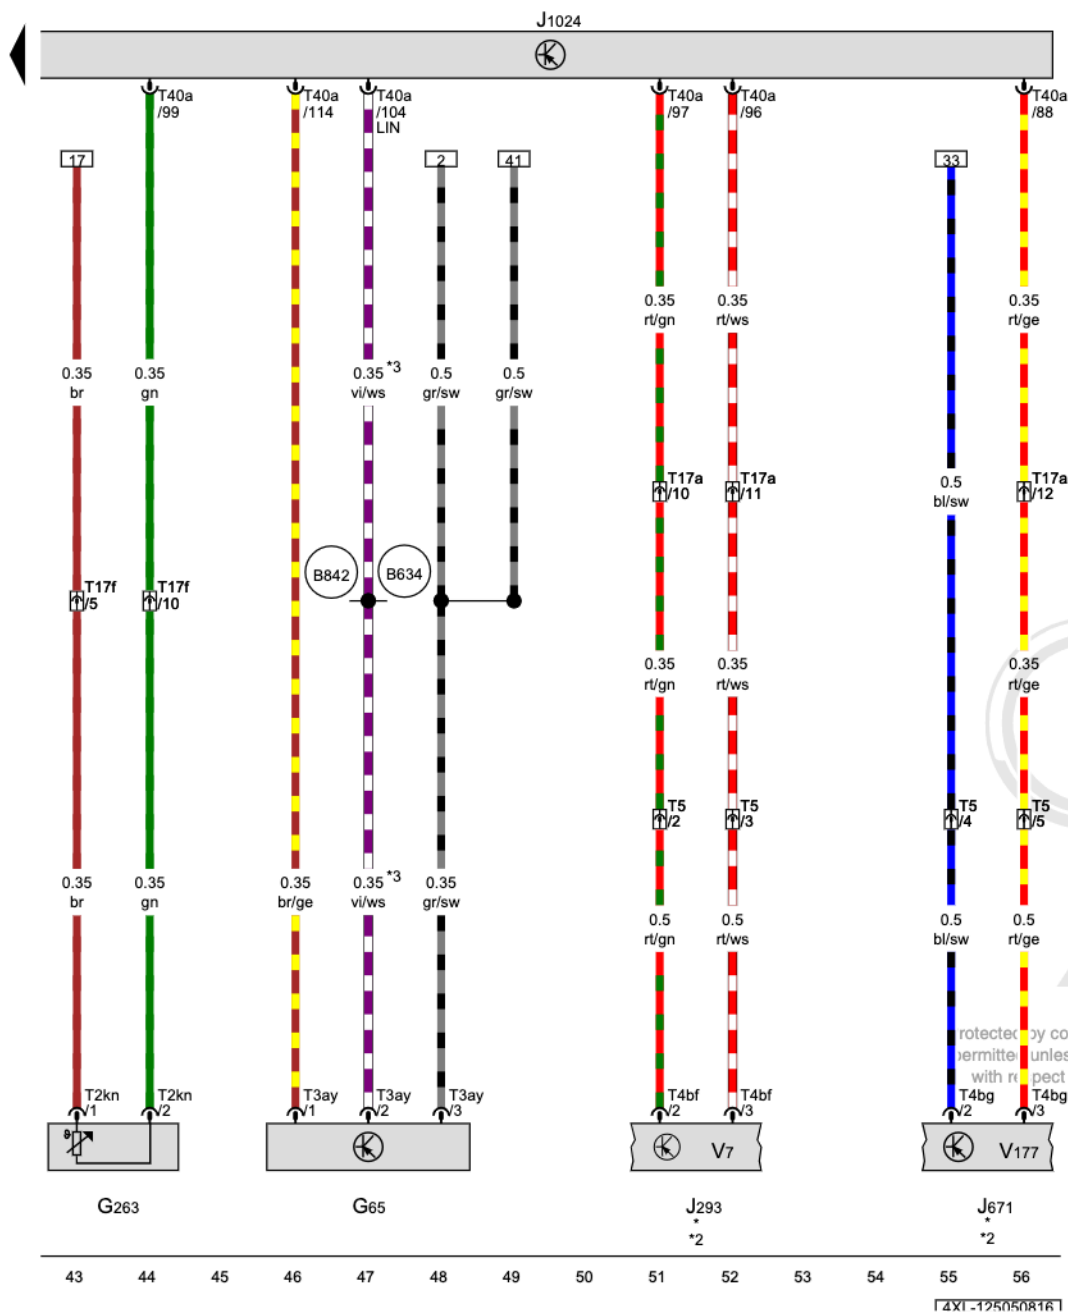

High pressure sensor, Evaporator vent temperature sensor, Radiator fan control module, Thermal management control module

- G65 High pressure sensor
- G263 Evaporator vent temperature sensor
- J293 Radiator fan control module, near the coolant fan
- J671 Radiator fan control module 2
- J1024 Thermal management control module
- T2kn 2-pin connector, black
- T3ay 3-pin connector, black
- T4bf 4-pin connector, black
- T4bg 4-pin connector, black
- T5 5-pin connector, in the center plenum chamber, black
- T17a 17-pin connector, Left plenum chamber E-box connector station, white
- T17f 17-pin connector, in the left A-pillar connector station, white
- T40a 40-pin connector, black
- V7 Radiator fan
- V177 Radiator fan 2

B634 Positive connection 2 (87) (in main wiring harness)

B842 LIN bus connection 8 (in main wiring harness)

- * pre-wired component
- *2 Refer to applicable engine wiring diagram
- *3 Data bus wire (LIN bus)

ws = white
sw = black
ro = red
rt = red
br = brown
gn = green
bl = blue
gr = grey
li = lilac
vi = lilac
ge = yellow
or = orange
rs = pink